

231-00-110
Sleeve: Static, Dual Travel 2 , LV, 2018

GREASE:
THIN LAYER
HIGH TEMP BLUE

029-08-162
O-Ring [1.8MM ID x 1.5MM CS] Metric, N-70, Static

GREASE:
THIN LAYER
OF SLICK HONEY

039-00-385
Spring: Torsion, 2018 Dual Travel 2, .041 Wire, .069 pitch, [.0071 in-lb/deg]

029-08-189
Seals: O-Ring, JIS P6 [5.8mm ID X 1.9mm CS], N-90, Dynamic

210-30-111
Cam: Shaft, Dual Travel 2, 2018

010-01-021
Ball [Ø 0.2500] 52100 Grade 25 Steel, Chrome Plated

210-24-286
Pulley: Dual Travel 2, 2018

GREASE:
THIN LAYER
OF SLICK HONEY

010-01-002
Ball [Ø 0.0938] Steel

GREASE:
THIN LAYER
HIGH TEMP BLUE

GREASE:
THICK LAYER
HIGH TEMP BLUE

019-01-070
Set Screw [M4 x .7mm x 4mm] , SS

TORQUE:
START THREAD 4 TURNS
TOP OF SET SCREW TO BE FLUSH WITH PULLEY

210-24-220
Plunger, Dual Travel 2, 2018

NOTE PROPER ORIENTAION OF PLUNGER

019-01-137
Set Screw [M4 x .7mm x 8mm] Dog Point, Torx, Black, Patchlock

TIGHTEN SET SCREW UNTIL SLIGHT BINDING IS FELT AS THE PULLEY IS ROTATED, THEN BACK OFF SET SCREW (CCW) 1/8 - 1/4 OF A TURN. VERIFY PULLEY ROTATES FREELY THROUGH FULL RANGE WITHOUT BINDING


039-00-384
Check Spring, 3.0 lbf/in, Dual Travel 2, 2018

029-08-034
Seals: O-Ring [4.5MM ID x 1.5MM CS] Metric, N-70, Static

210-24-216
Cap, Dual Travel 2, 2018

038-01-083
Retaining Ring: Wire, Internal [.282 Bore X .029 Wire X .324 OD] 302 SS

IMPORTANT:
VERIFY THREADS
FACING OUT

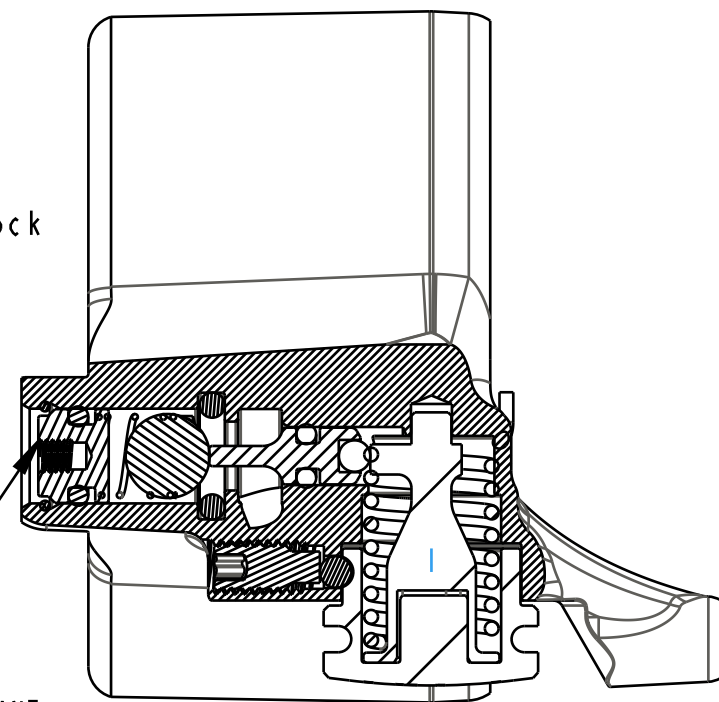

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
Sleeve Assy: Static,
Dual Travel 2, LV, 2018

SIZE DWG. NO.
C 806-29-555-KIT

PLOT SCALE: 1.75:1 SHEET 1 OF 1

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.